


Drenážní dlažba s vysokou propustností vody

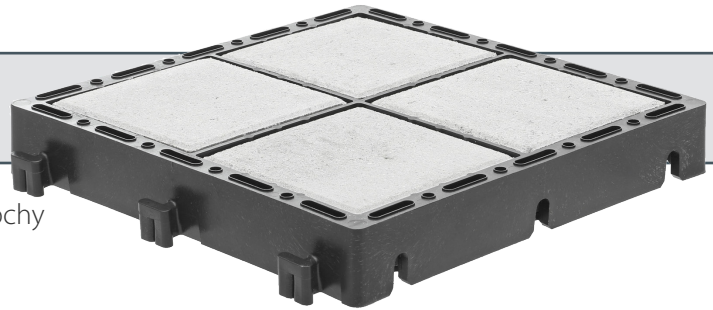

doporučeno pro:

- parkování, odstavné plochy
- chodníky, sportoviště
- průmyslové plochy

Specifikace Bloxx	
Rozměry:	33 x 33 x 5 cm
Váha m²:	7.02 kg
Váha kus:	0.78 kg
Celistvost	36 zámků v m ²
Nostnost:	až 800 t/m ² *
Pevnost v tlaku:	až 20 t (DIN 1072)
Stabilita v teplotách:	od -50° do 90° C
UV-resistant and weatherproof:	according to DIN EN ISO 4892-2 and DIN EN 60068-2-5
Infiltration performance:	infiltration performance I ₁₀ = 5200 in l/s*ha according to DIN 18130 (FGSV-MB)
Material:	LD-PE, recycled
Tensile strength:	> 5 kN/m
Environmental compatibility:	environmentally neutral according to OECD 202:2004
Highly durable:	according to DIN EN 124:2011 (D400)

* refers to ECORASTER® Bloxx module incl. concrete blocks

Concrete blocks	
Dimensions:	14.2 x 14.2 x 4.5 cm 5.59 x 5.59 x 1.77 "
Weight per piece:	2.12 kg 4.67 lbs
Dimension, indirect tensile strenght & breaking load:	according to DIN EN 1338; 2003-08
Available colors:	light grey (standard), red, white, anthracite; more colours upon request

Package	concrete blocks	Bloxx module
Packaging:	wooden pallet	plastic pallet
Qty. of concrete blocks per pallet:	432	-
Qty. of layer per pallet:	-	43
Area per pallet:	-	57.33 m ² 617.09 ft ²
Weight per pallet:	940 kg 2 072.35 lbs	412 kg 908.31 lbs
Dimensions cm inch:	120 x 80 x 60 47.24 x 31.5 x 23.6	105 x 135 x 229 41.3 x 53.15 x 90.16
Pallets per truck:	20	22
Area (qty.) per truck:	8 440 pcs.	1 261.26 m ² 13 576.09 ft ²



Your contact:

NOTE:

- a. Please note the installation instructions on our website! Subject to change without prior notice. E. & O.E.
- b. The listed details are nominal dimensions and subject to a certain tolerance due to material changes
- c. ECORASTER® Bloxx according to RAL GZ-806